

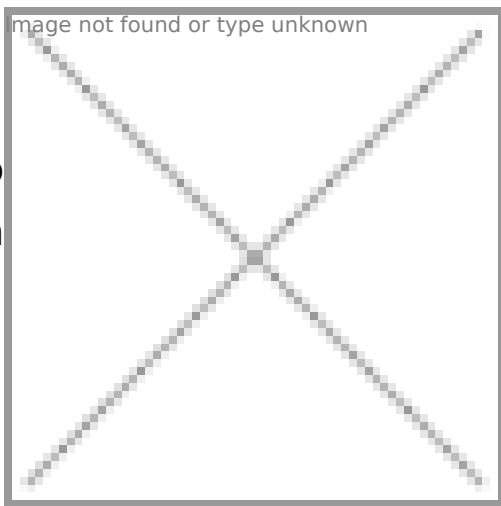


# EPDM Rubber expansion depending on the diam

# installments lengths

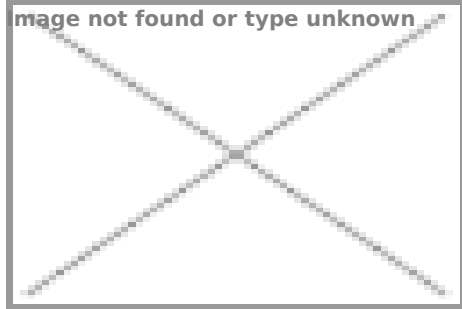

ation and shock absorpction in the rigid

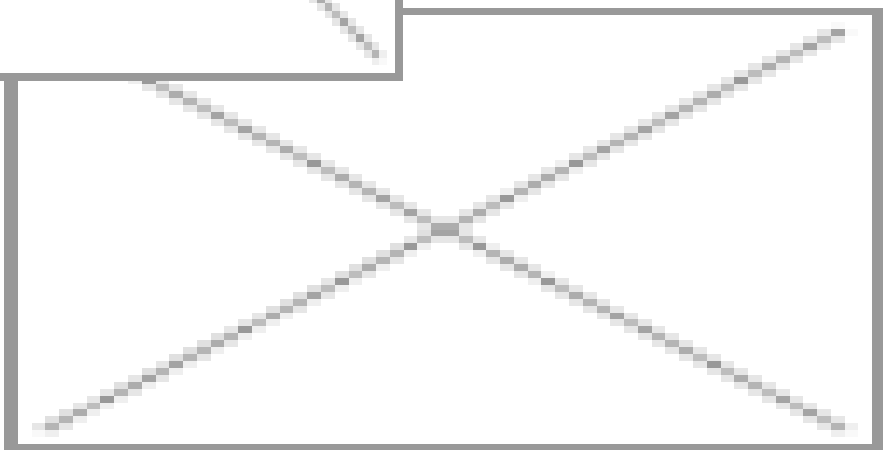

**Operating pressure:** 16 bar

**Heat resistance:** -10°C / +100°C

**Medium:** water


**Flanges:** PN 16

**Flanges material:** galvanized steel

**Material:** EPDM

Certain diameters are available from stock. Meantime, we hold the right of selling the stock in products.

DN	L (mm)	Compansion (mm)	Expansion (mm)	Lateral (mm)	Angular	Article number
32	95	8	4	8	15°	756148
40	95	8	4	8	15°	756146
50	105	8	4	8	15°	755128
65	115	12	6	10	15°	755146
80	130	12	10	12	15°	755145
100	135	18	10	12	15°	755122
125	170	18	10	12	15°	755235
150	180	18	10	12	15°	755123
200	205	20	14	18	15°	755069
250	240	22	14	18	15°	755052

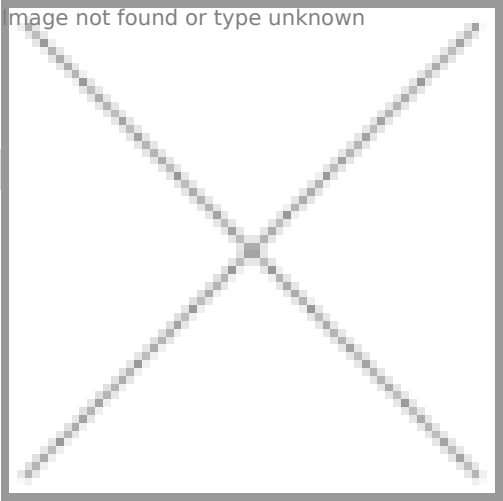

<b>DN</b>	<b>L (mm)</b>	<b>Compansion (mm)</b>	<b>mm)</b>	<b>Angular</b>	<b>Article number</b>
300	260	24		15°	756012