

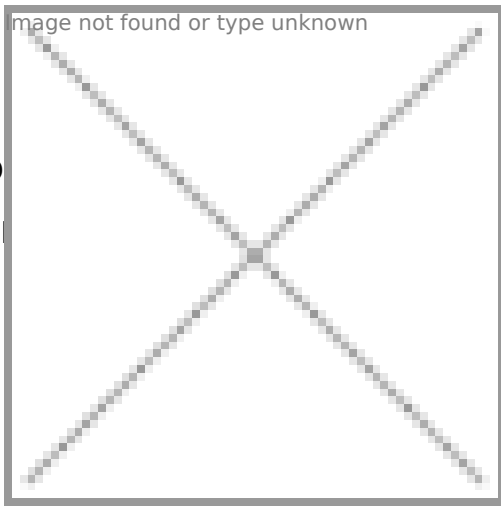


EPDM Rubber expansion and different installme

LO With big diameters

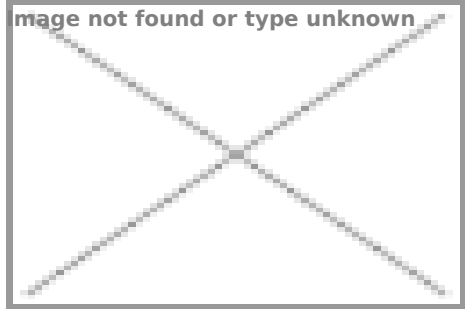

ation and shock absorpction in the rigid

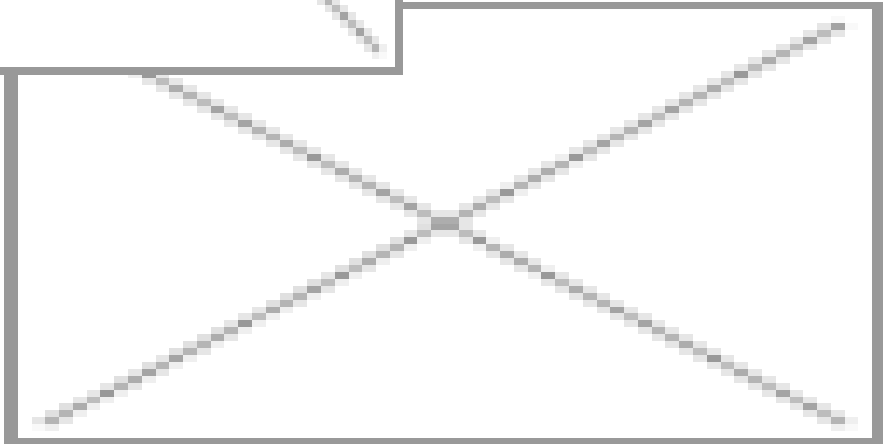

- Operating pressure:** 10 bar
- Heat resistance:** -10°C / +100°C
- Medium:** water
- Flanges:** PN 10 (according to EN1092)
- Flanges material:** galvanized steel
- Material:** EPDM

Certain diameters are available from stock. Meantime, we hold the right of selling the stock in products.

DN	L (mm)	Compansion (mm)	Expansion (mm)	Lateral (mm)	Angular	Article number
200	205	20	14	18	15°	755224
250	240	20	14	18	15°	755225
300	260	20	14	18	15°	756147
350	265	25	16	18	15°	756145
400	265	25	16	18	15°	756144
450	200	20	12	18	15°	756143
500	200	20	12	18	15°	756142
600	250	20	12	18	15°	756141