


## Agriflat/Agro Layflat ru

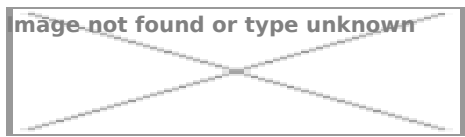

ar irrigation system. It's extremely strong  
of the hose is rubber.

and moderately acid and alkali resistant. It  
thanks to the tensile strenght of the

It's ozone and ageing resistant.

**Operating pressure:** 76

**Fracturing pressure:** 80

**Heat range:** 152

**Structure:** 76

**Interior:** 76

**Exterior:** 152

**Insertions:** 125

**Roll size m:** 32

**Vacuum:** 93

**Electrical resistance:** 110

**Diameter resistance:** 122

**Air speed:** 130

**Abrasion value:** 94

**Wall thickness:** 100

**Basic colour:** about 162

**Application:** about 84

**Material:** 91


**Flow:** 173

**Internal dimension:** 141

**Safety factor:** 36

**Bolt:** Silocord Alim abrasion resistant, white interior

**Specific weight:** Silocord abrasion resistant, black

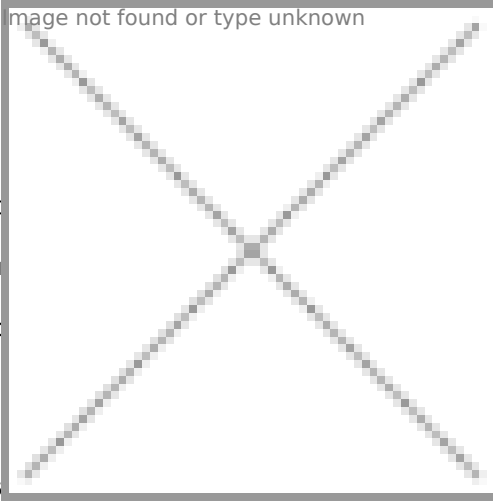

**Surface:** Silocord abrasion resistant, black

**Bend radius:** Silocord abrasion resistant, black

**Band and bold housing:** Silocord abrasion resistant, black

**Hardness:** Silocord abrasion resistant, black

**Design:** Turboflex UL abrasion resistant coating, black

**Straight claw distance:** Turboflex UL abrasion resistant, lightweight, flexible, black

**Key width:** Turboflex abrasion resistant suction-discharge hose

**Sizes:** Turboflex abrasion resistant suction-discharge hose

**Certification:** Turboflex abrasion resistant suction-discharge hose

**Production length:** Agriflat layflat rubber water hose

**DIN standard:** 8 bar

**Tensile elongation:** 6 bar

**Tensile strength:** 6 bar

**Ball sealing:** 6 bar

**Shat seal:** 6 bar

**Thickness:** 6 bar

**Test procedure:** Suction hose -0,8 bar vacuum

**Coating:** Suction hose -0,8 bar vacuum

**Ground joint union:** Vacuum -0,8 bar, Pressure 4 bar

**Diesel fuel:** Vacuum -0,8 bar, Pressure 4 bar

**Individually possible:** Vacuum -0,8 bar, Pressure 4 bar

**Food certification:** 20 bar

**Authorisation number:** 3560 075000

**Reinforcement:** 3530 090000


**Handle:** 3530 100000

**Shape:** 3530 110000

**Ball:** 3530 075000

**Housing:** 3530 080000

**Housing material:** 3506 150000

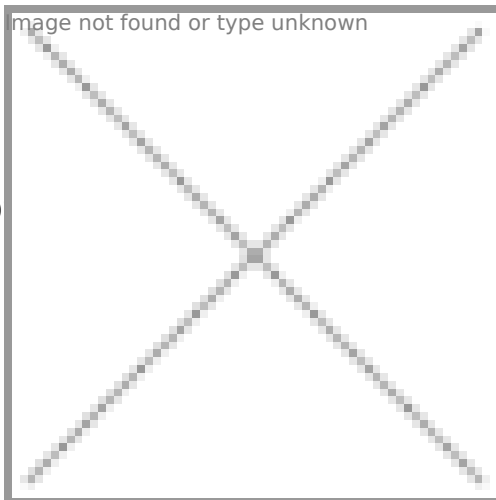

**Cold resistant:** 3506 075000

**Coolant (glokol, glizantin, etc.):** 3505 0

**Compatible:** 3505 150000

**Special design:** 3505 125000

**Plate:** 3070 032000

**Air:** 1x2 m

**High octane fuels:** 2x2 m

**Quality:** 2,5 m

**Not compatible:** 1,85 m

**Pressure resistance:** 1,6 + 1+1 m

**Permeability:** 1x2 m

**Cold resistant for short time:** 1,65 m

**Standard:** 2,4 m

**Elongation at break:** 1,5 m

**Fabric:** 1 m

**Super fuels:** 1 m

**Splicing:** 1,5 m

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Inside diameter (mm)	Wall thickness (mm)	Working pressure at 20 C (bar)	max. working pressure in bar	Burst pressure (bar)	Weight (kg/m)	Tensile strength in kg	Tekercsméret (m)	Cikkszám
102	3,5	16	20	50	1,35	12400	100	999312
102	3,5	16	20	50	1,35	12400	200	999206
127	3,9	15	18	45	1,7	17000	100	999208
127	3,9	15	18	45	1,7	17000	200	999239
152	3,9	14	17	42	1,95	17900	200	999210
152	3,9	14	17	42	1,95	17900	50	999209

