

## AIRDUC PE 362 Polyethylene medium-heavy

## pharmaceutical hose,

Image not found or type unknown



gases and for dust, powder, fibres  
chemical industry: foodstuff, pharmaceutical  
rice, cereals, sugar, milk powder,

powders, coffee, tea, grains, flour, frozen foods

- mixer, dryer, packaging machine, bulk-bag (big bag)-charging and discharging, mill
- tobacco industry: cigarette machine, tobacco conveying
- galvanic extraction
- chemical industry: chemical vapours, vapour return hose at loading arm, paint steam, spray mist extraction

### PROPERTIES

- medium-heavy duty
- Food grade wall, complies with: FDA 21 CFR 177.1520 3.1 and 3.2, EU-Directive 10/2011 and EC 1935/2004
- odourless and tasteless
- good resistance to alkalis and acids
- extremely good resistance to chemicals
- manufacturing process acc. GMP EC 2023/2006
- conforms to RoHS guideline
- REACH according to --> Technology / Technical Information / REACH

### DELIVERY VARIANTS

- further diameters and lengths available on request
- transparent (standard)
- special colours: full coloured
- customer-specific branding

### DESIGN

- AIRDUC® profile hose
- 1. spring steel wire firmly embedded in wall
- 2. wall: special polyethylene (PE)
- 3. wall thickness 0,8 mm approx.


### TEMPERATURE RANGE

- -35°C to 80°C

**Temperature:** -35°C/+80°C

**Wall thickness:** 0,8 mm

**Coil length:** 10 m

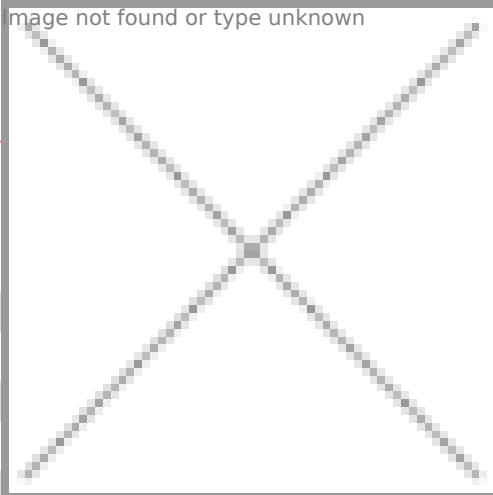

On stock at the manufacturer, short delivery

Inside diameter	Outer diameter (mm)	Weight (kg/m)	Article Nr.
25	30	0,21	362-0025-0000
28	34	0,25	362-0028-0000
30	37	0,21	362-0030-0000
32	39	0,23	362-0032-0000
38	45	0,26	362-0038-0000
40	47	0,28	362-0040-0000
50-51	57	0,34	362-0050-0000
55	62	0,37	362-0055-0000
60	67	0,4	362-0060-0000
63-65	72	0,44	362-0065-0000
70	79	0,56	362-0070-0000
75-76	84	0,6	362-0075-0000
80	89	0,64	362-0080-0000
89-90	99	0,71	362-0090-0000
100-102	109	0,79	362-0100-0000
110	119	0,86	362-0110-0000
120	129	0,94	362-0120-0000
125-127	134	0,98	362-0125-0000
150-152	159	1,16	362-0150-0000
160	169	1,24	362-0160-0000
200-203	210	1,55	362-0200-0000
250	260	1,92	362-0250-0000