

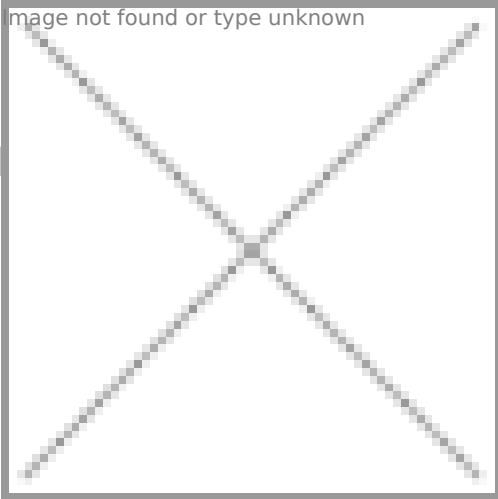


Axial expansion joint M

with welding end

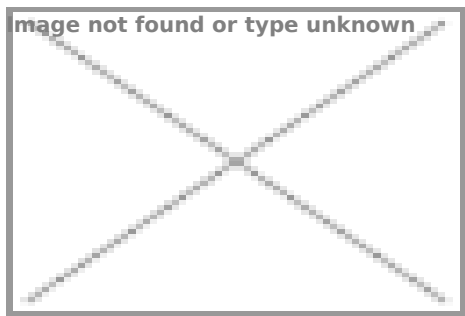


ation and shock absorpction in the rigid

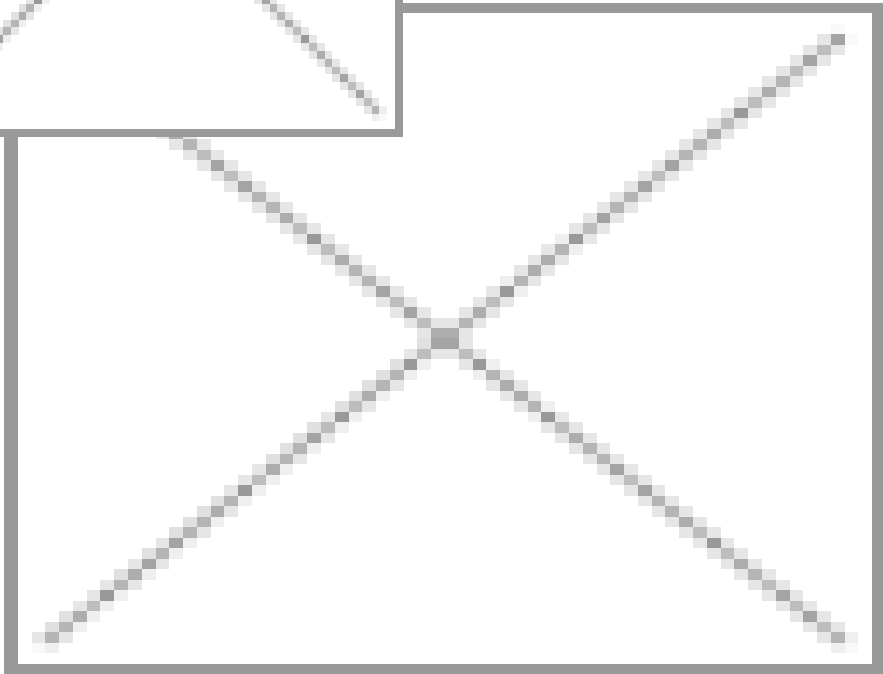

- Operating pressure:** 16 bar
- Heat resistance:** -20°C/+300°C
- Expansion joint body:** 321, inner flow correctioning protection tube
- Welding end material:** painted carbon steel
- Standard:** 97/23/CE

Certain diameters are available from stock. Meantime, we hold the right of selling the stock in products.

DN	Installation length (mm)	Welding end outside ø (mm)	Bellows number	Axial movements (mm)	Article number
25	185	38	17	11	755115
32	185	42,4	17	10	755112
40	200	48,3	17	13	755113
50	270	60,3	20	20	755116
65	260	76,1	16	20	755117
80	275	88,9	15	25	755118
100	310	114,3	20	32	755126
125	310	139,7	16	33	755119
150	350	168,3	20	40	755124
200	330	219,1	16	33	755121

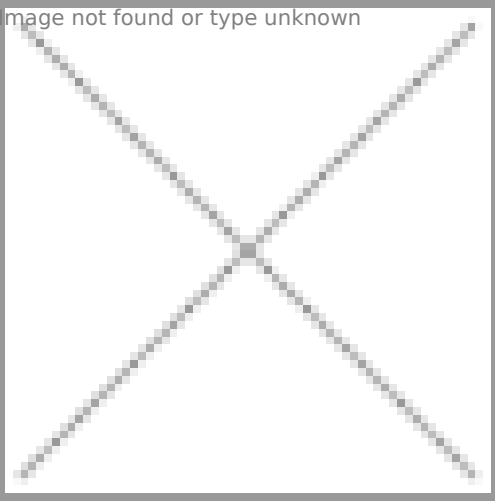

DN	Installation length (mm)	Welding	Special movements (mm)	Article number
250	360		40	755120