


Carbocord ® / 10 Oil an

harge hose

Image not found or type unknown

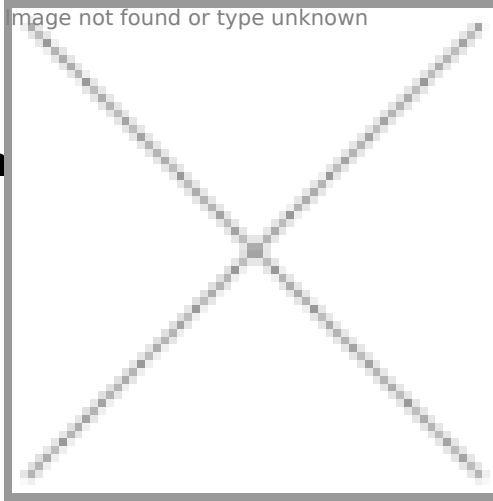

h is suitable for multi purposes. It's
ducts, up to max 50% aroma content.

e loading and unloading of unleaded fuels
nt up to 50% in fuel tanks and ships.
sel, fuels oils and mineral based hydraulic

ons.

The hose inner tube is conductive, the cover anti-static.

Felirat: ® CARBOCORD® - NBR - DRUCK / DISCHARGE - PN 10 BAR - Ω

Working pressure: 10 bar

Burst pressure: 30 bar

Temperature: -40°C /+90°C max. olaj hőfok 100 C

Inside: NBR, fekete, sima, Elektromosan vezetőképes $R < 10^6 \Omega$

Outside: SBR/EPDM, fekete, szövetlenyomatos, antisztatikus $R < 10^9 \Omega$

insertions: textile plies

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Inside diameter (mm)	Wall thickness (mm)	Outer diameter (mm)	Bending radius (mm)	Weight (kg/m)	Coil length	Article Nr.
32	6	44	210	1	40	3310 032000
38	6,5	51	300	1,28	40	3310 038000
50	7	64	400	1,75	40	3310 050000