
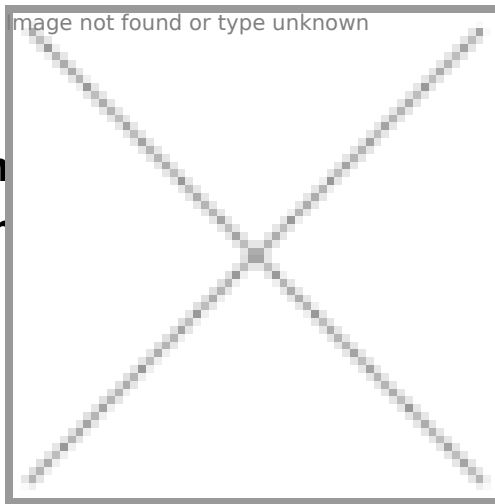


## Composite SST PTFE ch and lightweight suction

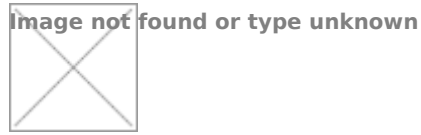

## Extremely flexible PTFE interior

large hose according to EN 13765:2010.

structure, is extremely lightweight and heavy-duty. The material of the interior and steel, the interior layer is PTFE which is

persistent against several chemicals and solvents.

It is especially developed for the use of the chemical industry, and transporting of aggressive chemicals and solvents. For example, acids, alkalis, chlorinated hydrocarbons, aromatic fuels, alcohols and petroleum products. In case of the tenacity, ask for our advice. The hose is suitable for tanker truck cars, as discharge hose, or for material forwarding at industrial plants.

Available only with couplings previously mounted on by the manufacturer, we deliver it pressure tested. From the warehouse in different diameters! In your inquiry, please give us the required coupling for the ends and the length of the hose.

**Heat resistance:** -30°C/+100°C (depending on the medium)

**Operating pressure:** 14 bar

**Safety factor:** 5:1

**Vacuum:** -0,9 bar

**Maximum produced length:** 30

**Interior:** PTFE, interior spiral made of AISI 316L steel

**Exterior:** PVC coated polyester fabric, exterior spiral made of AISI 316 L steel

**Standard:** EN 13765:2018

Certain diameters are available from stock. Meantime, we hold the right of selling the stock in products.

Inside ø (mm)	bending radius (mm)	Weight (kg/m)	Article number
1" - DN25	68	0,7	For order
1.1/2" - DN40	100	1,25	For order
2" - DN 50	150	1,7	999429
2.1/2" - DN 65	190	2,3	For order
3" - DN 80	250	3,1	999428
4" - DN 100	320	5,71	For order
6" - DN 150	497	12,49	For order

**Inside ø (mm)**

8" - DN 200

10" - DN 250

**bending**

**kg/m**

**Article number**

For order

For order

image not found or type unknown

image not found

