
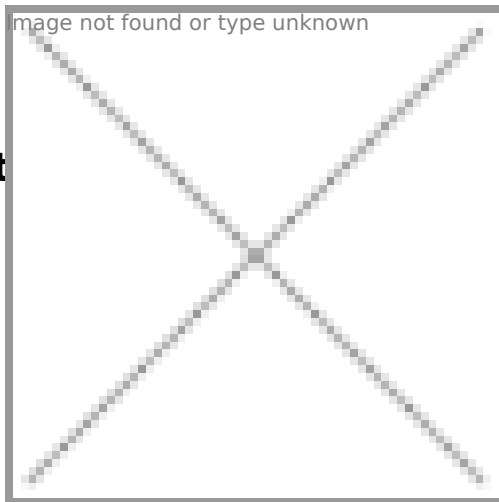


## CORRUFLEX Water suction

## Developed

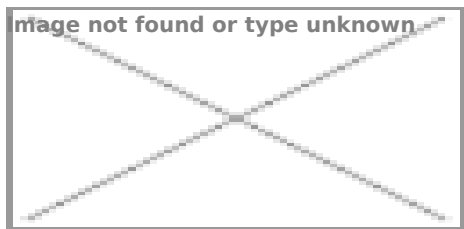

Materials with a new structure. Even in cold, it is suitable for industrial water, sewage, medium and heavy-duty.

**Heat resistance:** -15°C / +60°C

**Interior:** smooth, gray

**Exterior:** corrugated with orange spiral

**Roll size:** 50 m

**Vacuum:** -0,9 bar

**Material:** PVC

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

### Corrurflex no static wire

Belső Ø (mm)	Külső Ø (mm)	Falvastagság (mm)	Súly (kg/m)	Üzemi nyomás 20°C-on (bar)	Tekercsméret (m)	Cikkszám
51	60	4,5	0,88	4,5	50	4433 050000
76	87	5,5	1,42	3,5	50	4433 075000
100	116	7	2,4	2,5	50	4433 100000
102	118	7	2,5	2,5	50	4433 102000
110	124	8	2,75	2,5	50	4433 110000

### CORRUFLEX/AS A spirállal együtt futó rézszállal, mely által a tömlő leföldelhető

Belső Ø (mm)	Külső Ø (mm)	Falvastagság (mm)	Súly (kg/m)	Üzemi nyomás 20°C-on (bar)	Tekercsméret (m)	Cikkszám
51	60	4,5	0,96	2	50	4456 050000
76	87	5,5	1,6	2	50	4456 075000
102	116	7	2,7	2	50	4456 100000
127	142	7,5	3,45	2	30	4456 125000
152	168	8	4,6	2	30	4456 150000

