
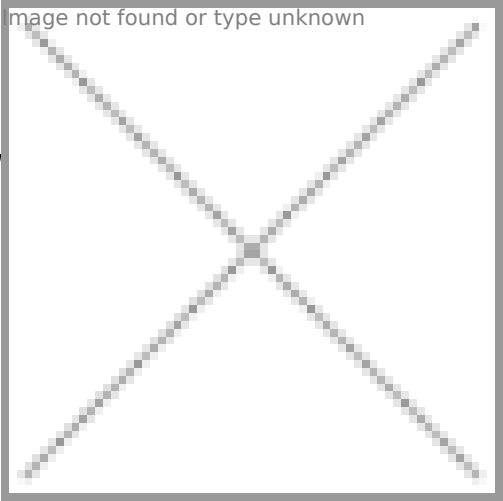


# Female quick coupling pneumatic couplig

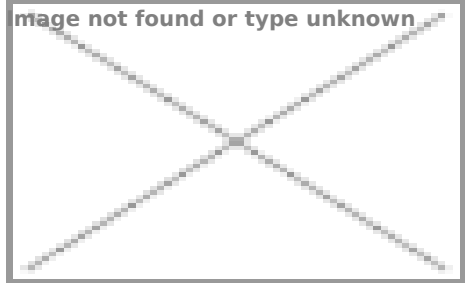

# quick coupling,

sign until it's in stock or for order.

nm

**Operating pressure:** Max. 35 bar

**Heat resistance:** -20 / +100 °C

**Flow:** max. 100 l/m

**Design:** with valve

**Compatible:** with Rectus 25-26 series

**Not compatible:** with Orion 44510

**Sealing:** NBR

The product is a permanent storage lots. Meantime, we hold the right of selling the stock in products.

## Nickel-plated brass

Female thread	Article number
G 1/4"	131032
G 3/8"	131006
G 1/2"	131007

## Brass

Female thread	Article number
G 1/4"	101050
G 3/8"	101051
G 1/2"	101052