
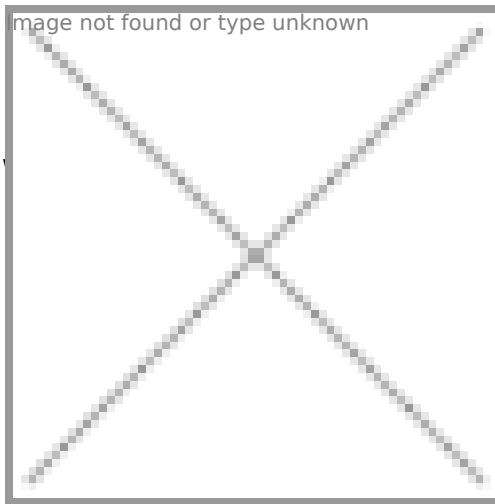


## Female quick coupling couplig

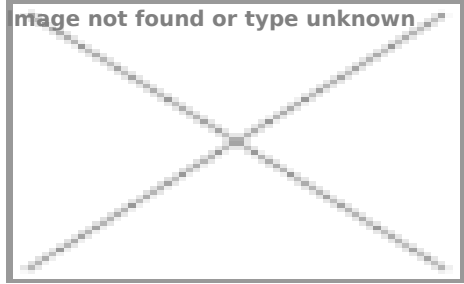

## Male quick coupling, pneumatic

Design until it's in stock or for order.

**Operating pressure:** Max. 35 bar

**Heat range:** -20 / +100 °C

**Flow:** max. 1000 l/min

**Design:** with valve

**Compatible:** with the Rectus 25/26 series

**Not compatible:** with the Orion 44510

**Sealing:** NBR

The product is a permanent storage lots. Meantime, we hold the right of selling the stock in products.

### Nickel-plated brass

Hose diameter mm	Article number
6	130022
8	130023
9	130024
10	130006
13	130003

### Brass

Hose diameter mm	Article number
6	101031
8	101032
9	101033
10	101034
13	101035