
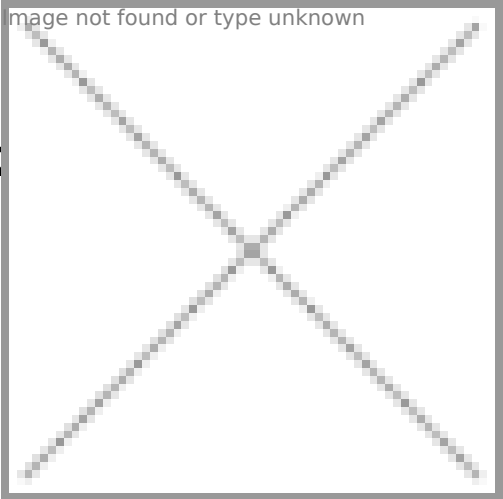


FEP-Fluorperform EN 12115 insertion

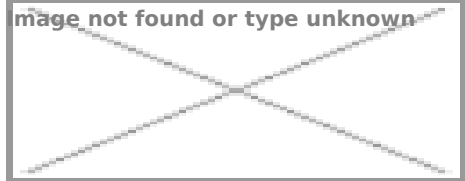

Technical hose with FEP

...ce similar to Teflon. It is antistatic and
...ality is high purity according to the FDA.
...eel reinforced with fabric insertion (it is
...on insertion).

Operating pressure: 16 bar

Bursting pressure: 64 bar

Heat resistance: according to EN12115:2011 , alsp -30°C / +110°C depending on the transfered medium, for short time 130°C in case of sterilization max. 30 minutes

Interior: FEP (Fluorinated Ethylene Propylene) coating, light coloured, smooth, FDA quality

Exterior: black, electrically conductive rubber, abrasion and weather resistant, fabric imprinted

Linings: fabric linings, steel wire helix for grounding

Roll size: 20 m

Vacuum: -0,9 bar

Electrical resistance: $10^6 \Omega$

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Inside Ø (mm)	Outside Ø (mm)	Bending radius (mm)	Weight (kg/m)	Article number
13	25	78	0,5	230045
19	31	125	0,75	230046
25	37	150	0,94	230047
32	44	175	1,1	230048
38	51	225	1,5	230049
51	65,5	275	2,4	230050
63,5	79,5	300	2,95	230051
76	92	350	3,6	230052