
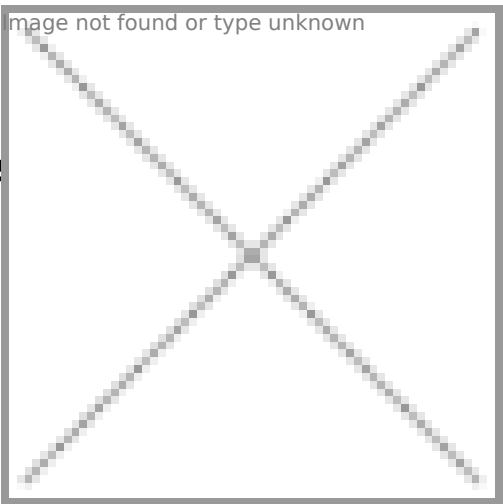


# FLOW-SM Extremely flexible

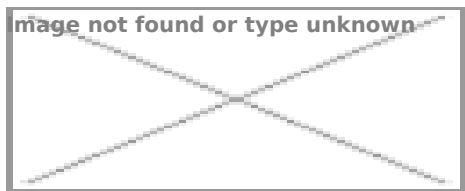

# smooth interior

corrugated exterior, provided with a

- extremely flexible
- crush resistant
- easy to clean thanks to the smooth interior

It is suitable for special areas where flexibility and smooth interior is a requirement, for example in the food, pharmaceutical and cosmetics industry.

Temperature range: -70/+260 C

Design:

- virgin
- black, electrically conductive
- fabric cover (stainless steel PP, PVDF)
- fabric cover + smooth rubber coating (EPDM or silicone)

The couplings are added by the manufacturer.

Just for order!

Inside ø (mm)	DN	Bending radius (mm)	Operating pressure with stainless steel metal braid cover (bar)
11,5	1/2"	38	50
15,5	5/8"	42	50
18,5	3/4"	50	60
22,8	1"	70	40
30,5	1.1/4"	85	45
36,5	1.1/2"	100	40
48,5	2"	140	25

