


Induform / RR Corrugat

Image not found or type unknown

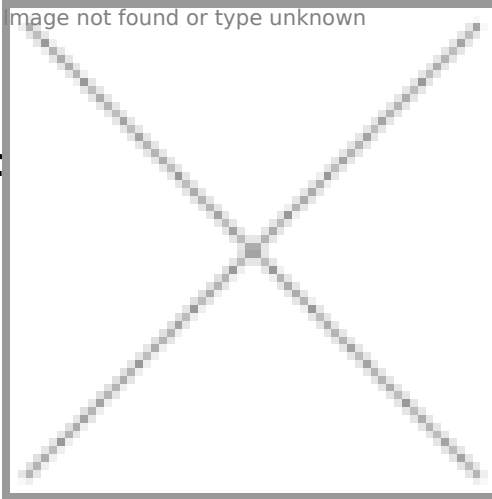

for heavy-duty. The exterior is

that is characterized by the strong cross-
on process in which the inner and outer
her with heat, which offers a much

stronger adhesion than many graded alternatives. Hose can be used as a
water supply hose at construction sites in industry, shipyards and other
locations where higher quality requirements are set for a water hose. Due
to its special construction, hose is extremely suitable for reel applications.

Felirat: ® INDUFORM®/RR PN 10 BAR

Operating pressure: 10 bar

Bursting pressure: 30 bar

Heat resistance: -20 °C / +60°C

Interior: black, smooth

Exterior: red, corrugated

Linings: polyester fabric linings

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Inside Ø (mm)	Wall thickness (mm)	Külső Ø (mm) Outside Ø (mm)	Weight (kg/m)	Roll size (m)	Article number
13	3	19	0,205	100	3000 013000
13	3	19	0,205	40	3000 013000-40
19	3,5	26	0,33	40	3000 019000-40
19	3,5	26	0,33	100/50	3000 019000-100
25	4	33	0,495	40	3000 025000-40
25	4	33	0,495	100/50	3000 025000-100
32	6	44	1,01	40	3000 032000-40

