
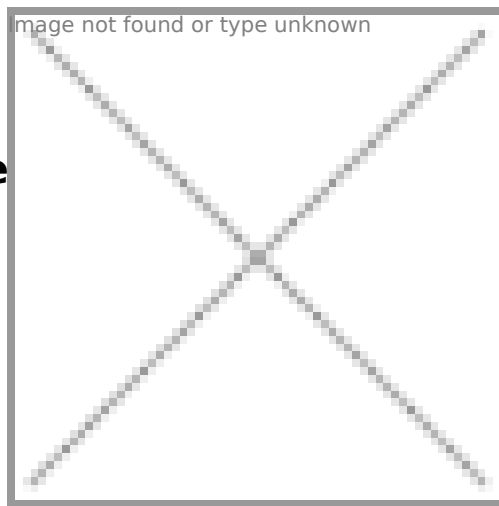


# Lift check valve Acid re

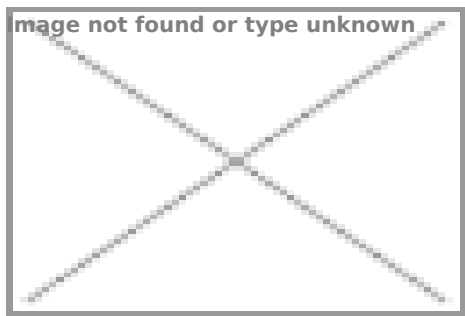

al and diagonal installation, both ends with

nds or NPT thread design with different

**Heat resistance:** -20°C / +200°C

**Body:** stainless steel AISI 316

**Sealing:** PTFE

**Sealing plate:** stainless steel AISI 316

The product is a permanent storage lots. Meantime, we hold the right of selling the stock in products.

DN	Length (mm)	Female thread	Operating pressure (bar)	Article number
13	63	G 1/2"	63	750623
20	71	G 3/4"	63	750621
25	81,5	G 1"	63	750624
32	91	G 1.1/4"	63	750626
40	97,5	G 1.1/2"	63	750627
50	117	G 2"	63	750628