
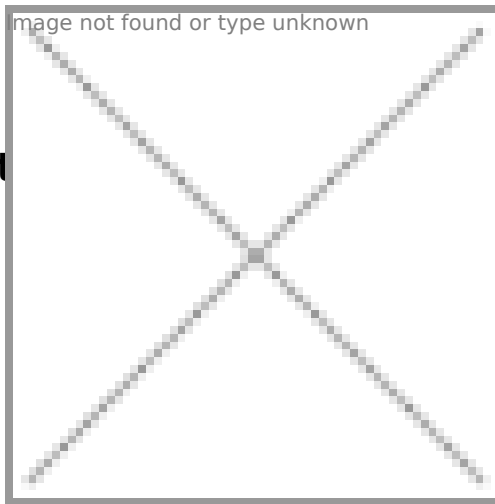


## Male quick coupling with coupling

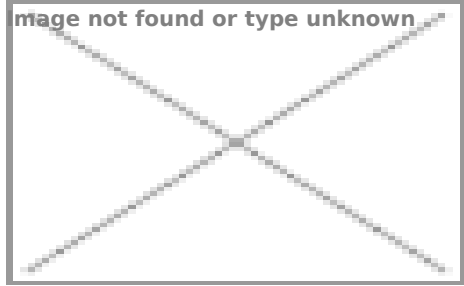

## coupling, pneumatic

sign until it's in stock or for order.

m)

**Operating pressure:** Max. 35 bar

**Heat resistance:** -20 / +100 °C

**Flow:** max. 100 l/m

**Design:** with valve

**Compatible:** with Rectus 25-26 series

**Not compatible:** with Orion 44510

**Sealing:** NBR

The product is a permanent storage lots. Meantime, we hold the right of selling the stock in products.

### Nickel-plated brass

#### Hose diameter mm

#### Article number

6

130009

8

130020

9

131022

10

130027

13

130004

### Brass

#### Hose diameter mm

#### Article number

6

101036

8

101037

9

101038

10

101039

13

101040