


Milkcord/SP Butyl Corru

Image not found or type unknown

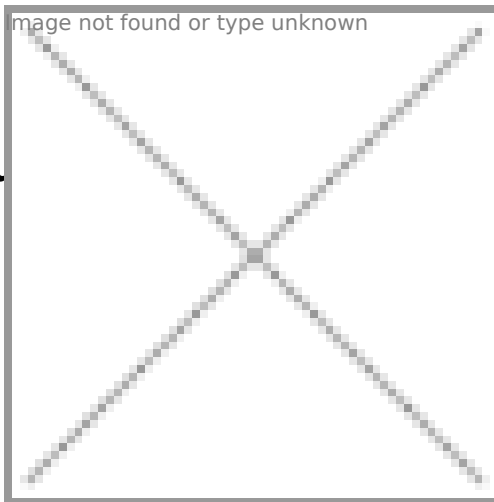

of milk and milky products, vegetable fats
foodstuff and alcoholic liquids with an
butyl tube is very suitable for higher
concentrations of acids and alkalis and therefore
long. The special designed microbes resistant
to mold and bacteria. The hose is very

flexible due to the corrugated cover in combination with the twin-spiral
construction and therefore suitable for loading and unloading of tanks. The
Milkcord®/SP/Butyl can also be handled easily due to the light weight
construction.

The resistance of any hoses is always depending on the temperature of the
conveyed medium. The working pressure information is at 20 C.

Felirat: Marking: Milkcord®/SP/Butyl Milkhose/Milchschlauch S/D - PN 10
bar - EG 1935/2004 - BfR XXI Kat. 2 - FDA - CFR 21§177.26.00 - Phthalates
free - BPA free - PAH free - 96% Alcohol

working pressure: 10 bar

Burst pressure: 30 bar

vacuum: -0,9 bar

temperature resistance: -30 °C / max +120°C (depends on medium)
Max. +130 °C steam cleaning without pressure, max. 30 min

inside: white, buthyl, Smooth seamless, taste and odourless, Phthalates
free, Bisphenol A (BPA) free

outside: Blue, fabric finish, flat corrugated, Abrasion resistant, Microbes
resistant, UV resistant, Weather resistant


insertions: 2 steel wire helix, Textile plies

Norm: BfR XXI:2002 (cat. 2), EN ISO 1307:2008, EU 1935/2004, FDA (CFR
21 § 177.2600)

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Butyl inside max. 96% alcoholic contact

Inside diameter (mm)	Wall thickness (mm)	outer diameter (mm)	Hajlítási sugár (mm)	coil length (m)	Article Nr.
25	5	35	60	40	3457 025000
32	6	44	70	40	3457 032000
38	6	50	80	40	3457 038000
51	6,5	64	100	40	3457 050000

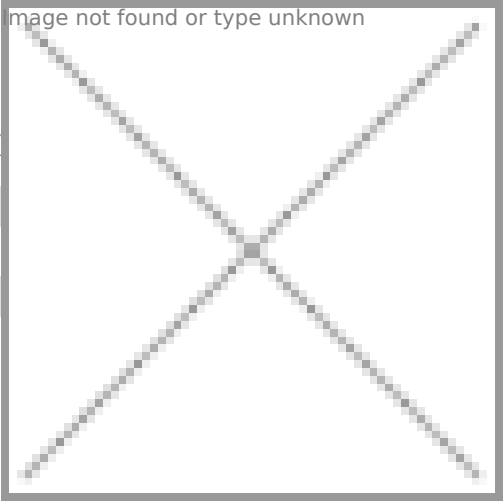

Inside diameter (mm)	Wall thickness (mm)	sugár (mm)	coil length (m)	Article Nr.
63	7	0	40	3457 063000
76	7,5	0	40	3457 075000
102	8	0	20	3457 100000