
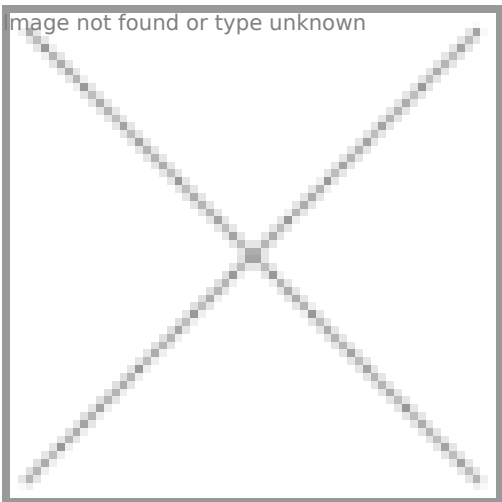


Nitrogen/Yellow High p

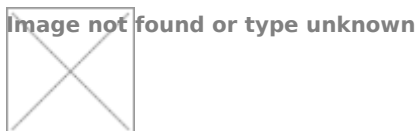

port air, water, nitrogen and other non-
plications in the petrochemical industry, at
uction facilities where nitrogen is used in

M ANTISTATIC WP/BP 25/75 BAR batch nr.

Working pressure on 20 °C: 25 bar

Burst Pressure: 75 bar

Temperature: -20/+60 °C

Inside: Black, smooth, thermoplat

Outside: Yellow, smooth, thermoplast, with longitudinal anti-static stripe

insertions: Aramid

Electric resistance: 2 black antistatic longitudinal stripes <10 9 Ω

Norm: EN ISO 1307:2008

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Inside Ø (mm)	Wall thickness (mm)	Outside Ø (mm)	Roll size (m)	Article number
19,5	5,25	30	40	3031 019000
19,5	5,25	30	20	3031 019000-20
25	5	35	40	3031 025000

