


# PROTAPE® PVC 310 (LI

Image not found or type unknown

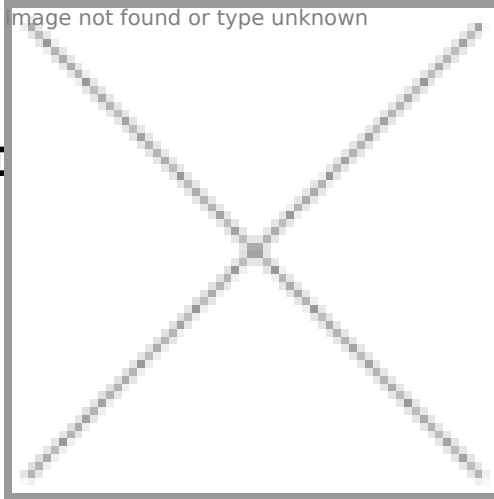

ases and for dust, powder, fibres  
system, filter system, oil mist extraction  
al vapours, vapour return hose at loading  
arm, paint steam, spray mist extraction

- X-ray machine: cable protection conduit (special type on request)
- heating hose: exterior hose as protection hose

## Properties

- lightweight
- highly flexible + compressible 3:1
- good resistance to alkalis and acids
- good resistance to chemicals
- flame-retardant according to: UL94-HB
- phthalate-free
- conforms to RoHS guideline
- REACH according to --> Technology / Technical Information / REACH

## Delivery variants

- further diameters and lengths available on request
- grey (standard)
- special colours: transparent, full coloured
- customer-specific branding

## Design

- PROTAPE® tape hose
- 1. spring steel wire integrated in wall
- 2. wall: high grade soft PVC
- 3. wall thickness 0,5 mm approx.

## Temperature Range

- -20°C to 70°C
- short time to 80°C

On stock at the manufacturer, short delivery time with regular shipments

ID	OD	Pressure	Vacuum (bar)	Bending radius	Súly kg/m	Art. Nr.
30	37	0,93	0,2	22	0,24	310-0030-0000
32	39	0,875	0,2	23	0,26	310-0032-0000
38	45	0,74	0,18	26	0,3	310-0038-0000
40	47	0,7	0,18	27	0,32	310-0040-0000

image not found or type unknown

ID	OD	Pressure	Ár	Súly kg/m	Art. Nr.	
50/51	58	0,41		0,31	310-0050-0000	
55	63	0,37		0,33	310-0055-0000	
60	68	0,34		0,36	310-0060-0000	
63/65	73	0,31		0,39	310-0065-0000	
70	78	0,29		0,42	310-0070-0000	
75/76	83	0,27		0,45	310-0075-0000	
80	88	0,25		0,47	310-0080-0000	
90	98	0,23		0,53	310-0090-0000	
100/102	108	0,2	0,05	58	0,57	310-0100-0000
110	118	0,18	0,045	63	0,62	310-0110-0000
114-115	123	0,18	0,045	66	0,65	310-0115-0000
120	128	0,17	0,045	68	0,68	310-0120-0000
125/127	133	0,16	0,035	71	0,71	310-0125-0000
130	138	0,16	0,035	73	0,73	310-0130-0000
140	148	0,14	0,035	78	0,79	310-0140-0000
150/152	158	0,13	0,03	83	0,84	310-0150-0000
160	168	0,13	0,025	88	0,87	310-0160-0000
178-180	188	0,11	0,025	98	1	310-0180-0000
200/203	208	0,1	0,015	108	1,11	310-0200-0000
225	233	0,09	0,01	121	1,25	310-0225-0000
250	258	0,08	0,01	133	1,39	310-0250-0000
300	309	0,07	0,01	159	1,95	310-0300-0000

**PVC elszívőtömlő**

Hőállóság	Wall thickness	Construction	Flame retardant	Coils
-20°C/+70°C ( rövid ideig + 80°C)	0,5 mm	PVC, szürke, beágyazott acél-drót spirállal	UL94-HB	10 m

