


# Pyroflat Layflat water h

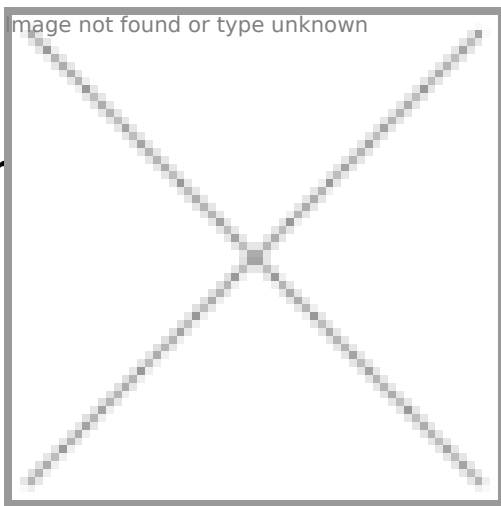

gth and rubber interior. It can be fully impregnated coating to make it more technical duty.

polyester fabric reinforcement

**Exterior:** polyurethane cover for the better weather and abrasion resistance

Certain diameters are available from stock. Meantime, we hold the right of selling the stock in products.

Inside Ø (mm)	Operating pressure (bar)	Bursting pressure (bar)	Weight (kg/m)	Roll size (m)	Article number
38	16	50	0,22	20/30/50/100	4022 038000
52	16	50	0,29	20/30/50/100	4022 050000
63	16	50	0,39	20/30/50/100	4022 063000
75	16	50	0,47	20/30/50/100	4022 075000
102	12	35	0,57	20/30/50/100	4022 100000