

Interior: EPDM, black

n. It's persistent against antifreeze fluid. It has excellent chemical resistance.

MAX. 100°C LOTNR**

Radiacord Rubber cooling hoses

Image not found or type unknown




Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Plane

Inside Ø (mm)	Wall thickness (mm)	Outside Ø (mm)	Operating pressure (bar)	Heat resistance (°C)	Roll size (m)	Article number
10	3,5	17	6	-30/+100	40	3100 010000
13	3,5	20	6	-30/+100	40	3100 013000
15	3,5	22	6	-30/+100	40	3100 015000
18	3,5	25	6	-30/+100	40	3100 018000
20	3,5	27	6	-30/+100	40	3100 020000
22	3,5	29	6	-30/+100	40	3100 022000
25	3,5	32	6	-30/+100	40	3100 025000

Fabric imprinted

Inside Ø (mm)	Wall thickness (mm)	Outside Ø (mm)	Operating pressure (bar)	Heat resistance (°C)	Roll size (m)	Article number
28	3,5	35	4	-30/+100	40	3100 028000
30	3,5	37	4	-30/+100	40	3100 030000
32	3,5	39	4	-30/+100	40	3100 032000
35	3,5	42	4	-30/+100	40	3100 035000
38	3,5	45	4	-30/+100	40	3100 038000
40	3,5	47	4	-30/+100	40	3100 040000
42	3,5	49	4	-30/+100	40	3100 042000
45	4	53	4	-30/+100	40	3100 045000

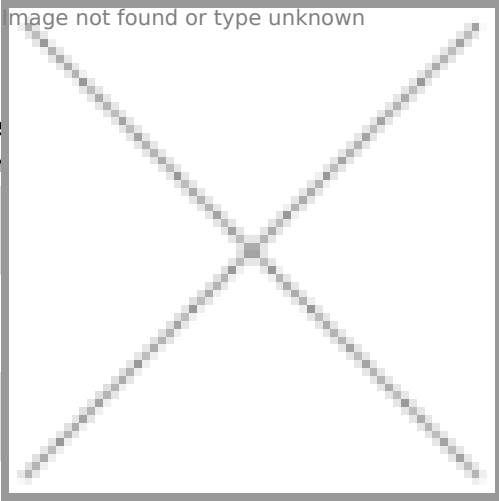

Inside Ø (mm)	Wall thickness (mm)	Outside Ø (mm)	Temperature resistance (°C)	Roll size (m)	Article number
48	4		-30/+100	40	3100 048000
50	4,5		-30/+100	40	3100 050000
60	5		-30/+100	40	3100 060000
63	5	73	-30/+100	40	3100 063000
76	4	84	-30/+100	40	3100 075000
90	4	98	-30/+100	20	3100 090000
102	4	110	-30/+100	40	3100 100000
110	6	122	-30/+100	20	3100 110000