
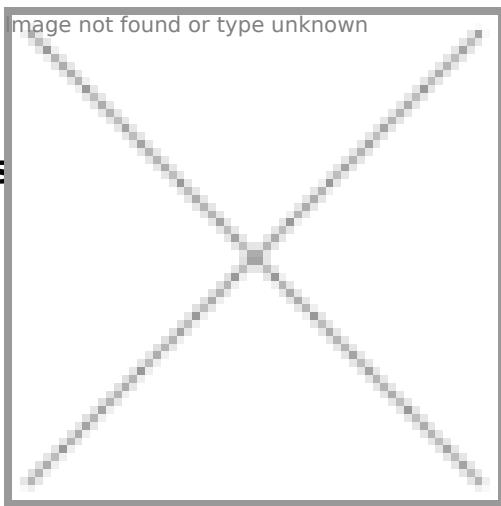


Silocord / Special Abras

o hose)

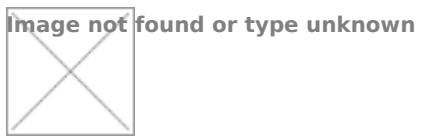

blasting material and other abrasive,

Felirat: ® SILOCORD® / SPEZIAL FÜR SPLITT - SODA - QUARZSAND

Operating pressure: 10 bar

Bursting pressure: 30 bar

Heat resistance: -30°C/+80°C

Interior: NR/SBR, black, smooth

Exterior: SBR, black, fabric imprinted

Linings: two crossed steel wire helix and fabric linings

Electrical resistance: R < 10 6 Ω

Abrasion resistance: 70 mm³ according to ISO 4649 (earlier DIN 53516) standard

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

| Inside Ø (mm) | Wall thickness (mm) | Outside Ø (mm) | Roll size (m) | Article number |
|---------------|---------------------|----------------|---------------|----------------|
| 76 | 11 | 98 | 40 | 3542 076098 |
| 102 | 12 | 126 | 20 | 3542 102126 |