
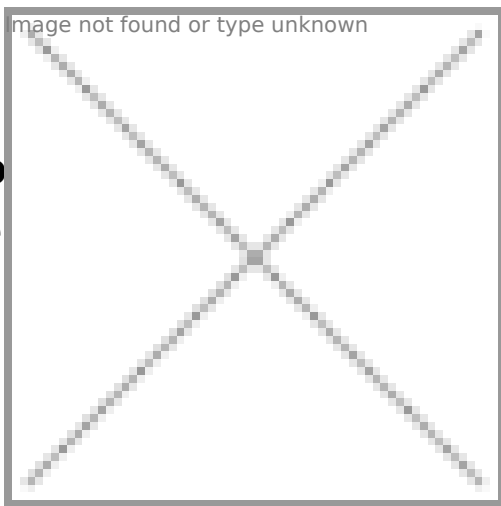


**Silocord® / Alim /SP Absorption/discharge hose**

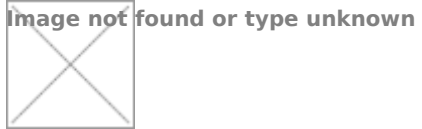

**quality**

VC-granulate, and grains. Static charge  
 ing the static wire.  
 ding to the right standards:

EG 1935-2004 / BfR XXI. 2002 cat. 4 FDA (CFR 21 § 177. 2600)

**Felirat:** ® SILOCORD® / ALIM GRANULATE PN 8 BAR - BfR XXI KAT. 4 - FDA

**Operating pressure:** 8 bar

**Bursting pressure:** 24 bar

**Heat resistance:** -30°C/+80°C

**Interior:** NR/SBR, white, smooth, abrasion resistant, food quality

**Exterior:** sBR, black, fabric imprinted

**Linings:** steel wire spiral, fabric lining and two crossed wire helix

**Vacuum:** -0,8 bar

**Abrasion resistance:** 100 - 110mm<sup>3</sup> according to ISO 4649 (earlier DIN 53516) standard

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Inside Ø (mm)	Wall thickness (mm)	Outside Ø (mm)	Roll size (m)	Article number
75	8	91	40	3565 075000
100	10	120	20	3565 100000