
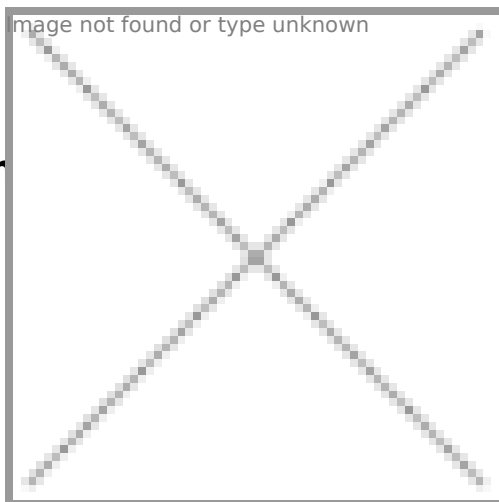


## Spurgo/SPL Canal clear

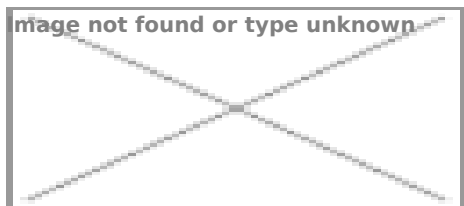

h spiral reinforcement. It's suitable for suction hose. It's creased in a small size can be manufactured with different

**Operating pressure:** 5 bar

**Bursting pressure:** 15 bar

**Heat resistance:** -30°C / +80°C, for short time +100°C

**Interior:** SBR/NBR rubber, black, smooth, abrasion resistant

**Exterior:** SBR/NBR, black, smooth, abrasion resistant rubber, fabric imprinted

**Linings:** strong steel spiral and fabric linings

**Roll size:** 40 m

**Vacuum:** -0,9 bar

The product is a permanent storage lots. Meantime, we hold the right of selling the stock in products.

Belső Ø (mm)	Falvastagság (mm)	Külső Ø (mm)	Hajlítási sugár (mm)	Súly (kg/m)	Tekercsméret (m)	Cikkszám
100	9	118	450	5,35	40	105025
110	10,5	131	500	6,2	40	105032
120	10,5	141	540	6,6	40	105033
125	10,5	146	600	6,8	20	105031
150	11,5	173	700	8,8	20	105034