
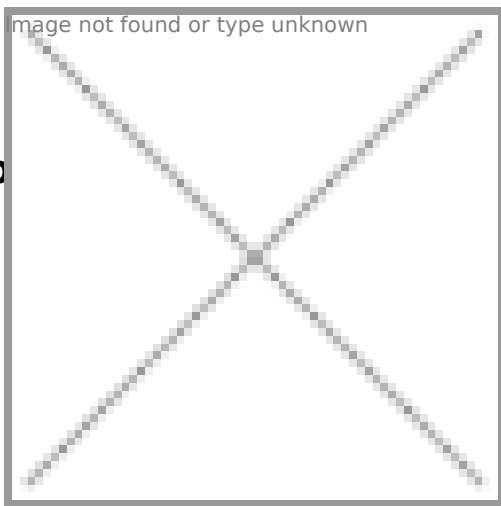


# Stainless steel quick connector

# g with thread

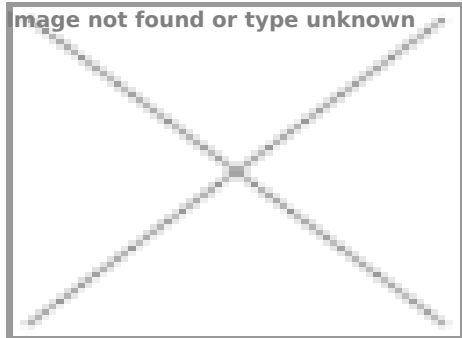

...e thread without valve, but with a ball lock.  
...FDA qualified.

Operating pressure: 200 bar

**Heat range:** +100 C

**Material:** Nemesacél

The product is a permanent storage lots. Meantime, we hold the right of selling the stock in products.

## Female part with female thread

Female thread	Exposed diameter (mm)	Article number
1/4"	11,8	300232
3/8"	11,8	300233
1/2"	11,8	300230
3/4"	11,8	300235

## Female part with male thread

Male thread	Exposed diameter (mm)	Article number
3/8"	10	300236
1/2"	11,8	300234

