
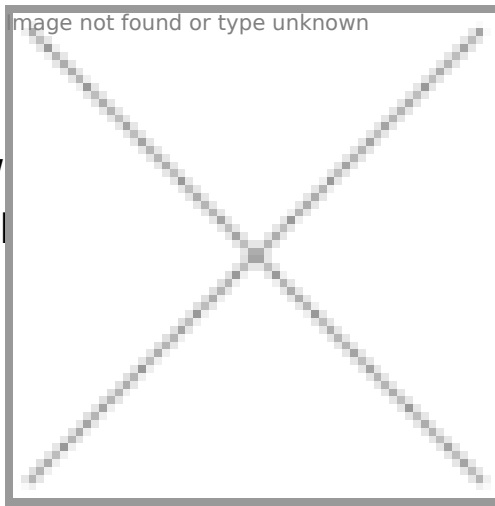


# Steam hose coupling with 14423 Galvanised Steel

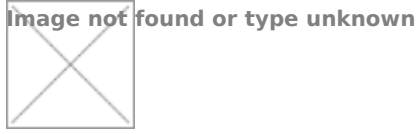

## Head According to DIN

Sealing swivel nut, which is made of  
rubber does not contain the clamp, it is

the clamp's screws have to be checked

and tighten.

**Operating pressure:** On 18 bar for 210°C hot water, on 18 bar for 210°C saturated steam

**Material quality:** 1.4305

Certain diameters are available from stock. Meantime, we hold the right of selling the stock in products.

### Female thread

### ID x Wall

### Article Nr.

G 1/2"

13 X 6

102841

G 3/4"

19 X 7

102840

G 1"

25 X 7,5

102414

G 1.1/4

32 x 8

102260

G 1.1/2"

38 x 8

102848

G 2"

50 x 9

102849

### Male thread

### ID x Wall

### Article Nr.

G 1/2"

13 X 6

102842

G 3/4"

19 X 7

102839

G 1"

25 X 7,5

102843

G 1.1/4

32 x 8

102844

G 1.1/2"

38 x 8

102846

G 2"

50 x 9

102847