
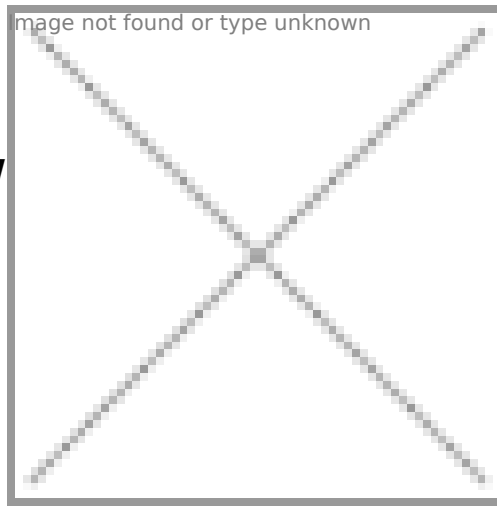


## Steam hose coupling w (earlier DIN 2826)

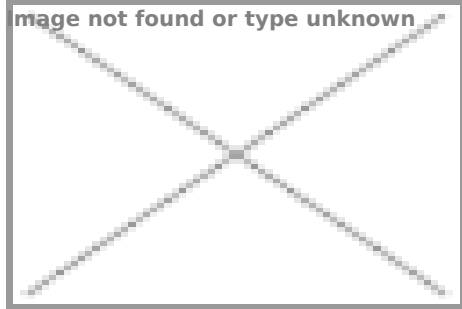

## ing to DIN 14423

ed steel and it has a hose tail with a male  
sure brass clamp. After the installation of  
re to be checked and tighten.

**Operating pressure:** 18 bar on 120°C for hot water, 18 bar on 210°C for saturated steam

Certain diameters are available from stock. Meantime, we hold the right of selling the stock in products.

| Inside Ø x wall | Male thread | Article number |
|-----------------|-------------|----------------|
| 13 X 6          | R 1/2"      | 101248         |
| 19 X 7          | R 3/4"      | 101249         |
| 25 X 7,5        | R 1"        | 101250         |
| 38 X 8          | R 1. 1/2"   | 102281         |
| 50 X 9          | R 2"        | 102446         |