


Stroz coupling Hose tail

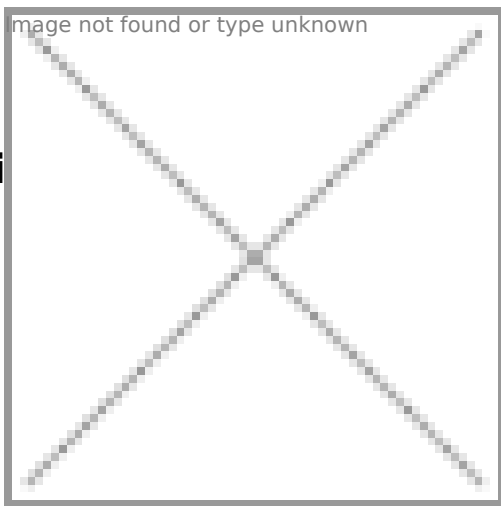

(16 bar) with long hose tail.
 oil resistant)
 food and heat-resistant).

- Claw distance:
- DIN standard:
- D = Claw distance 31 mm
 - C = Claw distance 66 mm
 - B = Claw distance 89 mm
 - A = Claw distance 133 mm

- NEN 3374 standard:
- 2" = Claw distance 81 mm
 - 2.1/2" = Claw distance 81 mm
 - 3" = Claw distance 81 mm

Design: alloy coupling PN16

The product is a permanent storage lots. Meantime, we hold the right of selling the stock in products.

Hose ø (mm)	Claw distance (mm)	Nominal size / Letters by DIN standard	Article number
19	31	D	5110 019031
25	31	D	5110 025031
25	44	.	5110 025044
25	66	C	5110 025066
32	66	C	5110 032066
38	52	.	5110 038052
38	66	C	5110 038066
38	81	.	5110 038081
52	66	C	5110 050066
52	81	.	5110 050081
63	81	.	5110 063081
63	89	B	5110 063089
70	89	B	5110 070089

Hose ø (mm)	Claw distance (mm)	DIN standard	Article number
75	81		5110 075081
75	89		5110 075089
80	89		5110 080089
90	133		5110 090133
100	115		5110 100114
100	133		5110 100133
110	133		5110 110133
125	148		5110 125148
150	160	F with 3 claws	5110 150159

