
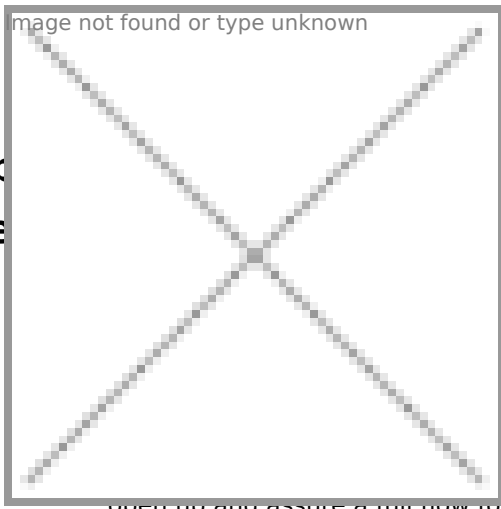


**TR Dry Disconnect coupling  
TRV series male with female**

**with female thread  
(ISO 228 / BSP)**

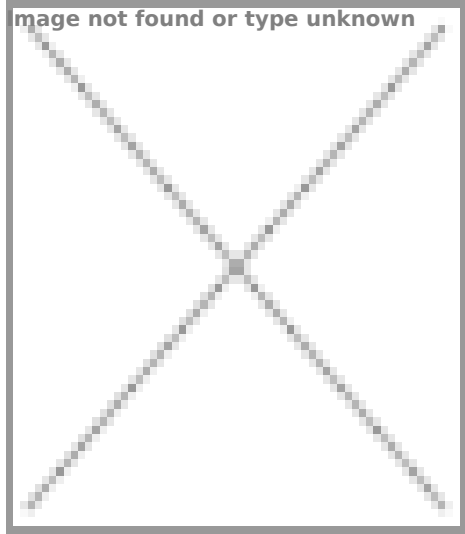

...ction a valve shuts down on both sides, by  
...release of the left-over materials  
...The components of the coupling are fully  
...0°degree turn. In such case the valves  
...open up and assure a full flow for the medium.

**Available sizes**

- DN 25 to DN 100
- Others on request

**Materials**

- Stainless steel (1.4571/1.4408)
- Hand wheel (TRM 40 - 100)
- Polypropylene
- Others on request

**Connections**

- Thread: BSP, NPT
- Flanges: EN, ASME
- Others on request

**Seals**

- O-ring: FPM, EPDM, FFKM, NBR
- Threaded seal: PTFE
- Others on request

**Applications**

Suitable for all loading and transfer processes in the area of fluid handling, e.g.

- Loading tank wagons
- Loading tank trucks
- Loading containers
- Loading ships
- Loading aircraft
- Filling barrels
- IBC containers
- Coupling stations
- Particularly in processes involving hazardous media
- Can be used with all fluids (liquids and gases). Including rapid-hardening, light pasty and highly viscous media
- Can be used with all types of hoses

DN	Thread	D (mm)
25	G 1	44

image not found or type unknown

**DN**

32  
40  
50  
65  
80  
100

**D (mm)**

54  
63  
80  
94  
118  
146

