
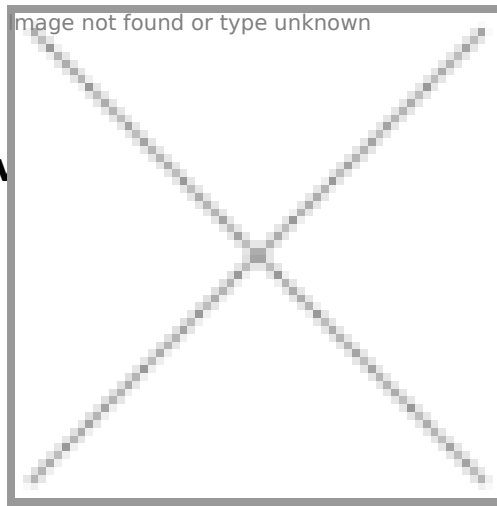


# VENTIFLON 250 AS Solv conductive PTFE spiral

t electrically

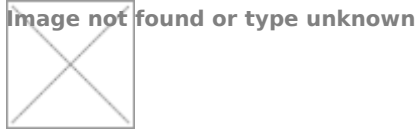

e, chemical and solvent resistant. The  
or chemical steams and gases. The hose is  
s steel helix reinforcement. It does not  
tation.

Other diameters can be ordered up to DN 1000!

**Heat resistance:** -150°C / +250°C ( for short time +270°C)

**Interior:** black, teflon

**Exterior:** black, teflon with stainless stell spiral

**Roll size:** 3-6 m -it can be manufactured with different diameters

**Electrical resistance:** 106 Ohm

**Standard:** ATEX 2014/34/EU, TRGS 727

Will be manufactured with short delivery time. MOQ 3 m

Inside diameter (mm)	Weight (kg/m)	Bending radius (mm)	Vacuum (bar)	Article Nr.
50	0,57	18	-0,27	475-0050-1003
60	0,64	20	-0,22	475-0060-1003
75	0,82	24	-0,16	475-0075-1003
80	0,88	24	-0,14	475-0080-1003
90	0,98	26	-0,1	475-0090-1003
102	0,82	28	-0,085	475-0100-1003
110	0,9	30	-0,075	475-0110-1003
114	0,94	31	-0,07	475-0115-1003
125	1,02	34	-0,06	475-0125-1003
140	1,14	36	-0,04	475-0140-1003
152	0,76	38	-0,035	475-0150-1003
160	0,81	40	-0,03	475-0160-1003
203	1	48	-0,02	475-0200-1003
275	1,36	64	-0,015	475-0275-1003
325	1,65	74	-0,01	475-0325-1003

