


## Virgin PTFE hose Uncoated

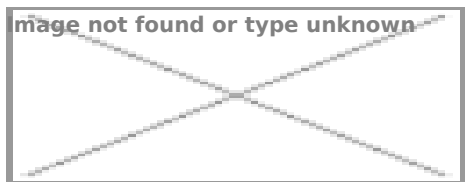

(polytetrafluoroethylene) hose is suitable for high temperatures, also qualify for the foods and cosmetics applications, as bushing of electric cables in heat

Connectors can be transferred with a black, anti-static design or with acid resistant coating.

**Heat resistance:** -70°C / +260°C

**Standard:** 21 CFR 177.1550., 21 CFR 178.3297., according to the US Pharmacopeia class VI. regulations, BPSA/FDA, 3-A health standard, European Migration Directive 1935/2004.

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

| Inside Ø (mm) | Tolerance (mm) | Outside Ø (mm) | Falvastagság (mm) w Wall thickness (mm) | Operating pressure on 20°C (bar) | Article number |
|---------------|----------------|----------------|---|----------------------------------|----------------|
| 1             | ±0,20          | 3              | 1                                       | 30                               | 200193         |
| 2             | ±0,20          | 4              | 1                                       | 23                               | 200177         |
| 3             | ±0,20          | 5              | 1                                       | 18                               | 200031         |
| 4             | ±0,20          | 6              | 1                                       | 15                               | 200178         |
| 5             | ±0,25          | 7              | 1                                       | 13                               | 200152         |
| 6             | ±0,25          | 8              | 1                                       | 11                               | 200179         |
| 8             | ±0,30          | 10             | 1                                       | 9                                | 200180         |
| 10            | ±0,30          | 12             | 1                                       | 8                                | 200181         |
| 12            | ±0,35          | 14             | 1                                       | 7                                | 200184         |
| 14            | ±0,35          | 16             | 1                                       | 6                                | 200061         |
| 16            | ±0,40          | 18             | 1                                       | 5                                | 200194         |
| 18            | ±0,40          | 20             | 1                                       | 5                                | 200195         |
| 20            | ±0,40          | 22             | 1                                       | 4                                | 200014         |
| 22            | ±0,50          | 25             | 1,5                                     | 6                                | 200197         |
| 25            | ±0,50          | 28             | 1,5                                     | 5                                | 200155         |

